

Fitted to python systems  
SPC pumps provide the  
optimum cooling rate for  
soft drinks, beers & wines

Braided hose or brewery  
tubing available to order

### Principal applications

Designed for continuous operation in chillers, coolers,  
vending and general water applications

### Features

Capacity up to 12.8 litres/minute

Up to 6.3 metres head

Low maintenance & long life

Available with plugs & leads fitted to suit application

Agitator propeller fitted as standard

Top mounted with keyhole pp mounting plate

IP44 motor housing


IP54 motor housing option

110V or 230V single phase 50Hz/60Hz versions



Drawings not to scale  
Dimensions in millimetres

**SPC21**

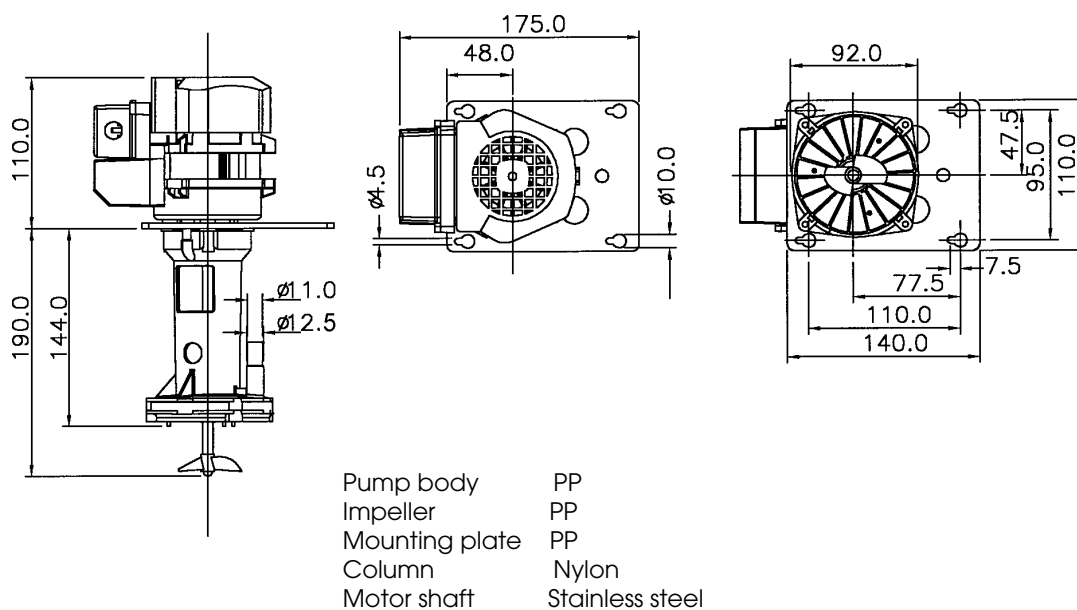


### Specification

Model	Motor height	Overall length	Weight kilos	Max capacity litres/min	Max head metres	Outlet port Ømm	Temp range °c	*Max specific gravity	Motor output Watts
SPC 21	110	300	2.5	12.8	6.3	plain 11/12.5 combined	-20° to +85°	1.0	30

\*assuming maximum viscosity of 30cp. Refer to the Company for higher viscosities & specific gravities

### Performance Tested with clean cold water @ 20° c

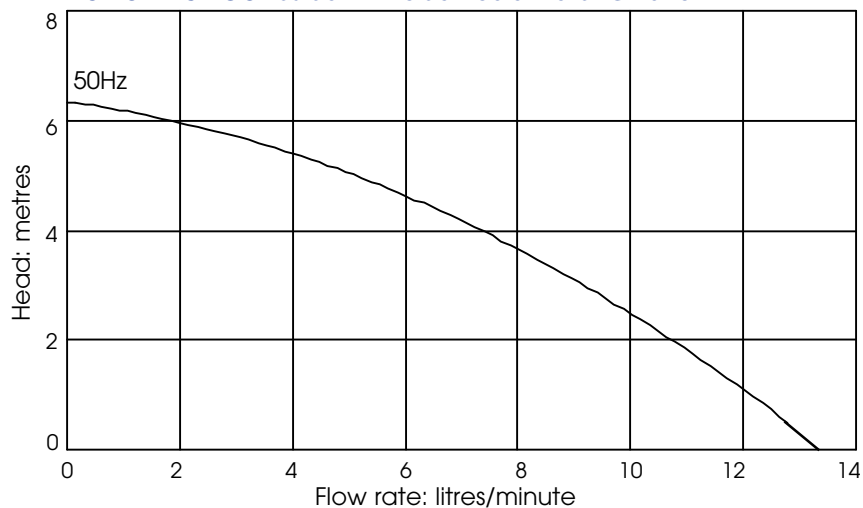

NOTE: These pumps are designed for use with clean fluids. Solids will cause jamming. Abrasives will reduce pump life & invalidate the warranty.  
SPC pumps are self priming & can run dry  
The company reserves the right to change specifications

a division of **the** Electric Motor Company Limited

phone+44 (0)23 8066 6685  
fax+44 (0)23 8066 6880  
email: info@totton-pumps.com  
www.totton-pumps.co.uk